


TAPE AND REEL SPECIFICATIONS

■ Plastic Tape Carrier

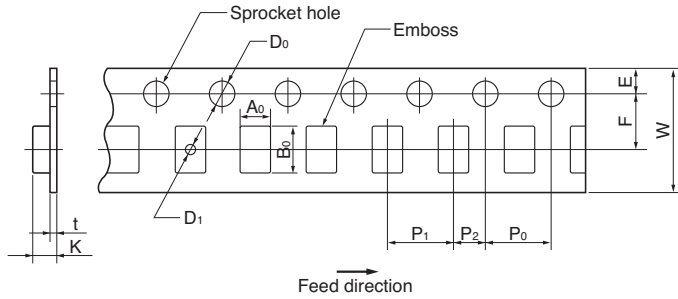

Unit: mm

Case Code	A0 ± 0.2	B0 ± 0.2	K ± 0.2
J	1.0	1.8	1.1
P, P2	1.4	2.2	1.4
P2 *1	1.55	2.3	1.3
A3	1.9	3.5	1.1
A2 (U)	1.9	3.5	1.4
A	1.9	3.5	1.9
B3	3.2	3.8	1.4
B15	3.25	3.8	1.7
B2 (S)	3.3	3.8	2.1
C2	3.7	6.4	1.7
C	3.7	6.4	3.0
V	4.6	7.7	2.4
D	4.8	7.7	3.3


*1: G/PS series

Case Code	Unit: mm								
	W ± 0.3	F ± 0.05	E ± 0.1	P ¹ ± 0.1	P ² ± 0.05	P ⁰ ± 0.1	D ⁰ + ₀ ^{0.1}	D ¹ min.	t
J	8	3.5	1.75	4	2	4	φ1.5	-	0.2
P, P2								-	
P2 *1								-	
A3								-	
A2(U)	12	5.5	8	8	8	φ1.5	φ1.0	0.2	
A							φ1.5		0.25
B3(W)									0.2
B15									0.2
B2(S)	12	5.5	8	8	8	φ1.5	0.3		
C2							φ1.5	0.4	
C								0.3	
V								0.3	
D	12	5.5	8	8	8	φ1.5	0.3		

*1: G/PS series


■ Packing Orientation

ex. R: Cathode on the side of Sprocket hole

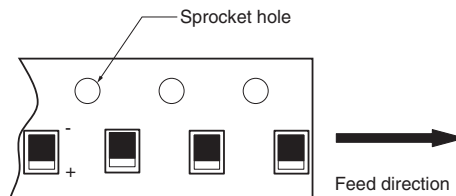

- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

REEL

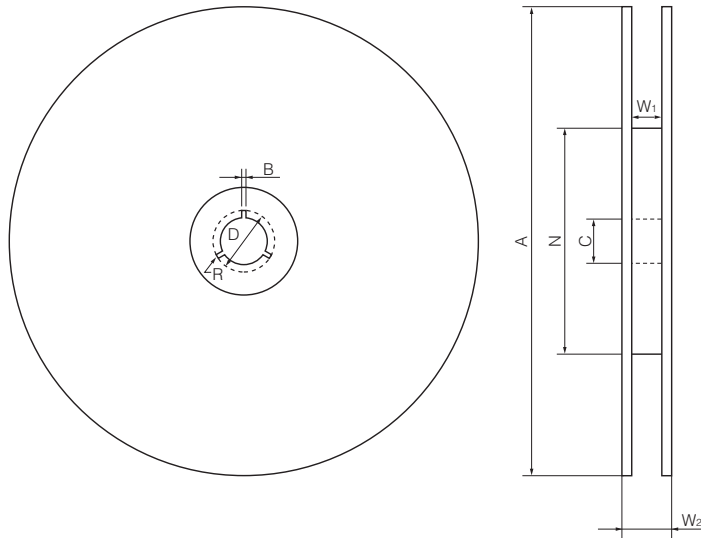

Unit: mm

Tape Width	A	N Min.	C ± 0.5	D	B ± 0.5	W1	W2 Max.	R
8 mm	$\phi 180^{+0}_{-3}$	$\phi 50$	$\phi 13$	$\phi 21 \pm 0.5$	2	9.0 ± 1.0	11.4 ± 1.0	1
12 mm						13.0 ± 1.0	15.4 ± 1.0	
12 mm	$\phi 330 \pm 2$	$\phi 80$	$\phi 13$	$\phi 21 \pm 1.0$	2	14.0 Max.	18.5 Max.	1

Case Code	$\phi 180$ Reel	$\phi 330$ Reel
J	4000	—
P,P2	3000	—
A3	3000	—
A2(U)	3000	—
A	2000	—
B3(W)	3000	—
B15	2500	—
B2(S)	2000	—
C2	1000	4000
V	1000	3000
C,D	500	2500

[Quantity Per Reel]



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.